

PM-COILED PIPE MARKER DESCRIPTION

Coiled Pipe Markers are designed to identify piping in all types of indoor/outdoor environments. Our unique manufacturing process allows the marker to easily wrap around any pipe up to 6" (152.4 mm) OD. Flat markers with strap on ties are available for pipe diameters of 10"(254mm), 12" (304.8 mm) and 18"+ (457.2mm)+.

No preparation or adhesive is required for easy installation. Markers are made from 16 or 19 mil. rigid PVC vinyl and legends are sub-surface printed protecting it with a layer of plastic.

- Ideal for rusty, dirty or sweating pipes where adhesive markers cannot be used
- No pipe surface preparation required
- Coiled construction quickly snaps and grips around pipe
- Flat markers for 6"+ (152.4 mm)+ diameters, come with strap on cable ties
- Markers can be removed during line maintenance and reinstalled
- Flow direction arrows are printed on each marker
- Industry standard and custom legends and colors available
- Complies with CAN/CGSB-24.3-92 and ASME A13.1 standard for pipe identification with regard to color, letter height and marker size



PHYSICAL PROPERTIES

Material Thickness	16 mil, 19 mil. /0.016", 0.020" (0.4064mm, 0.4826mm)
Service Temperature Range	-40°F to 160°F (-40°C to 71°C) **
Flame Spread	ASTM E-85 Tested Rating at 25 or less
Water Resistance	Excellent
Chemical Resistance	Excellent
ASME A13.1 Standard	Complies
CAN/CGSB-24.3-92 Standard	Complies
Flow Direction Arrows	Yes

** Not recommended for constant temperatures of over 185°C (71°F)

MARKER SIZES

Coiled Pipe Markers come in all industry standard colors and sizes that comply with CAN/CGSB-24.3-92 and ANSI/ASME A13.1 requirements for pipe identification.

Custom colors and legends are available on request and must be specified in detail prior to each order placed.

PRIMARK ID	PIPE DIAMETER (Inc. Insulation)	MARKER WIDTH	TEXT HEIGHT	MARKER TYPE
PM20	3/8" – 5/8" (9.53 mm - 15.875 mm)	4" (101.6 mm)	1/4" (6.35 mm)	Coil-On
PM30	3/4" – 2" (19.05 mm - 50.8 mm)	8" (203.2 mm)	1/2" (12.7 mm)	Coil-On
PM40	2" – 4" (50.8 mm - 101.6 mm)	12" (304.8 mm)	1-1/4" (31.75 mm)	Coil-On
PM50	4" – 6" (101.6 mm - 152.4 mm)	12" (304.8 mm)	1-1/4" (31.75 mm)	Coil-On
PM55	2" – 6" (50.8 mm - 152.4 mm)	12" (304.8 mm)	1-1/4" (31.75 mm)	Coil-On
PM60	6" – 10" (152.4 mm - 254 mm)	17" (431.8 mm)	1-3/4" (44.45 mm)	*Tie Strap Req. Cable Ties incl.
PM70	10" – 18" (254 mm - 457.2 mm)	24" (609.6 mm)	2-1/2" (63.5 mm)	*Tie Strap Req. Cable Ties incl.
PM80	18"+ (457.2 mm) +	32" (812.8 mm)	3-1/2" (88.9 mm)	*Tie Strap Req. Cable Ties incl.

*36" (914.4 mm) long cable ties are provided for PM 60, PM 70 and PM 80 markers.

STANDARD COLORS

Coil Markers are available in all standard colors and include directional arrows to note the direction of flow in pipe.

YELLOW		BROWN	
ORANGE		PURPLE	
RED		BLACK	
GREEN		WHITE	
BLUE		GREY	




DRAWINGS

PM-20, 30, 40, 50 and 55 are coiled to securely warp around the pipe. Directional flow arrows are printed directly on the marker

PM20

4"W x 3"L (101.6 mm x 76.2 mm) - Fits 3/8" - 5/8" OD (9.53 mm - 15.875 mm)

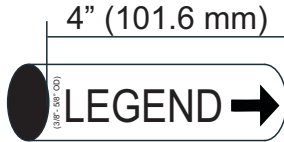


PM30

8"W x 8"L (203.2 mm x 203.2 mm) - Fits 3/4" - 2" OD (19.05 mm - 50.8 mm)




PM40

12"W x 17"L (304.8 mm - 431.8 mm) - Fits 2" - 4" OD (50.8 mm - 101.6 mm)

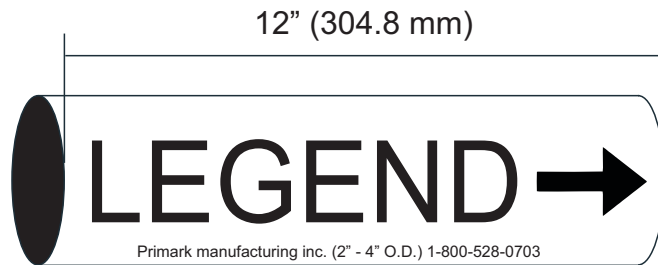

PM50

12"W x 20.5"L (304.8 mm x 520.7 mm)
- Fits 4" - 6" OD (101.6 mm - 152.4 mm)

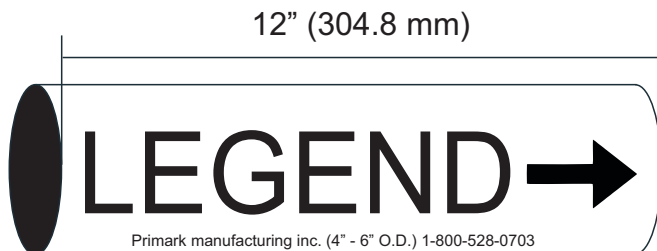

PM55

12"W x 20.5"L (304.8 mm x 520.7mm)
- Fits 2" - 6" OD (50.8 mm - 152.4 mm)

